


BX-62RS

Shredder, Chipper, Wood Chipper, Wood Shredder, Tractor

Item no.: J33-10280

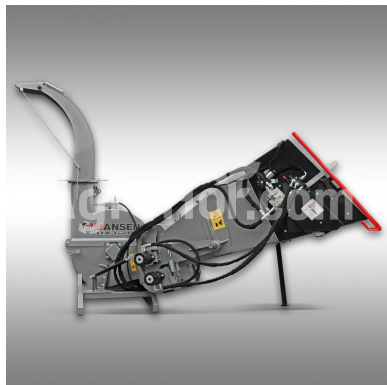

Seller

Agrohof Kft.
6064 Tiszaug, Bokros tanya 16.
Tax number: 25366895-2-03
EU VAT number: HU25366895

Sales

+36 56 770 010
info@agrohof.com

<https://agrohof.com/product/bx-62rs-shredder-chipper-wood-chipper-wood-shredder-tractor>



Parameters

Name	Value
Weight	576 kg
RPM	540 rpm
Dimensions	1400x1600x2500 mm
Tractor Power	min 30 HP

Description

The JANSEN® BX-62RS is a top-of-the-line high-performance tractor shredder with impressive functions for efficient wood chipping and shredding. This makes this tractor chipper the ideal choice for professional farmers, landscapers, and anybody looking for a reliable, high-performance solution for processing wood.

FACTS THAT SPEAK FOR THEMSELVES!

Hydraulic feed: The hydraulic feed makes the job easy and effective. The two large feed rollers automatically feed and crush without additional work.

Variable feed speed: The variable feed roller speed allows you to adjust the machine for different material diameters. From small to large diameters – it does it all. The maximum diameter for shredding material is 16.5 cm.

Safe operation and powerful drive: The included PTO and built-in safety shear pin make the JANSEN® BX-62RS compatible with tractors up to 100 HP. The solid construction ensures safe and reliable performance. This machine requires a minimum tractor engine of 30 HP and a PTO speed of 540 RPM.

Solid construction and low maintenance: The material thicknesses of this chipper ensure durability. The machine is designed to be low maintenance, and the flywheel cover can be opened with just a single screw to access the four knives. These knives are double-sided and if needed can be turned.

Practical design for flexibility: The easy-fold chute, strong shock absorbers and swivel discharge chute offer easy transport options and adapting to various working conditions. An optional 50 cm discharge chute extension is sold separately.

TECHNICAL DATA:

Tractor power: min. 30 HP

Cut material: Ø up to 165 mm

Drive: P.T.O. (included)

RPM: max. 540

Roller in-feed: hydraulic (via tractor hydraulics)

Feed roller hydraulic flow rate: from 10 L/min

Mount: 3-point linkage from Cat. I (up to Cat. III, note max. tractor power)

Flywheel diameter: 76 cm

Number of knives: 4 knives, 1 counter knife

Dimensions (transport position): approx. 140x160x250 cm (LxWxH)

Package dimensions(Number of 2): 1. 120x90x125 cm (LxWxH) 2. 200x100x110 cm (LxWxH)

Total weight: 576 kg

Shipping weight: 619 kg

IMPORTANT TO KNOW:

A tractor shredder is not ideally suited for needle-like materials such as spruce, pine, or cedar, and the desired result may also be lacking for willow. These materials are simply too soft for the feed rollers and flywheel, which can result in poor performance. Certainly, a better result can be achieved by adding

wood branches or by processing certain diameters, but this is often not satisfactory.

Also, for the production of wood chips intended for a wood chip heating system, a tractor shredder is rather unsuitable as it does not produce standardized wood chips. The size of the wood chips depends on the type of wood and the shredder type and can be irregular, especially with fibrous, thin, or needle-like material. The use of standardized wood chips is common in wood chip heating systems but requires special shredders, which are typically found in a much higher price category.