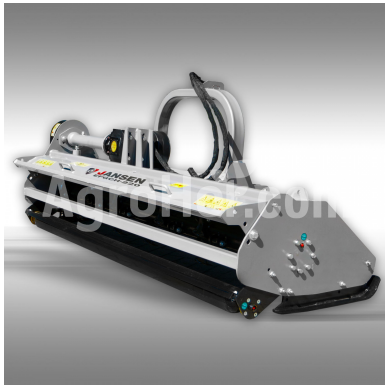


EFGCH-220

Flail mower 220cm

Item no.: J33-10254

**Seller**

Agrohof Kft.
6064 Tiszaug, Bokros tanya 16.
Tax number: 25366895-2-03
EU VAT number: HU25366895

Sales

+36 56 770 010
info@agrohof.com

<https://agrohof.com/product/efgch-220-flail-mower-220cm>

**Parameters**

Name	Value
Weight	550 kg
Length	2100 mm
RPM	540 rpm

Description

The especially robust construction of the mulch mower EFGCH-220 with hydraulic sideshift makes it stand out. It has a special reinforced angular gearbox and is outstanding in its operation as a mulch mower, a flail mower, etc.

The flail mower has a mowing width of 210 cm and is driven using a P.T.O, included as part of the delivery.

By using the hydraulic lateral traverse function the mower can be moved to both left and right. For this function you need a hydraulic control circuit on your tractor, as the mower unit has a double-action hydraulic cylinder for this purpose.

This mower unit has the most heavy-duty gearbox in its class. Unlike mower units equipped with light Y blades, this mower has high inertia generated by the heavy hammer blades and heavy shaft. This allows our machine to perform better.

The 30 specially hardened, 0.8 kg hammer blades, which are arranged on a double spiral drive shaft, shred clippings to a minimum size. Even very high grass, bushy or straw-like clippings are no problem for this mower!

The mulcher additionally has a trailing roller and a freewheel gearbox. The cutting height can be set with the top controller and runners mounted on the side. The suspended, galvanised slats at the front of the mower unit prevent stones escaping.

Due to the open rear bonnet maintenance work or changing hammer blades will be facilitated. Please be informed that the bonnet has to be closed while operating.

The mower unit is hung using the three point linkage of your tractor (from Cat. I. upwards). Your tractor should have at least 50 HP.

Technical specifications:

Length: 2100 mm

Weight: approx. 550 kg

Mounting: three point hitch from Cat. I

Tractor: min. 50 HP

Hydraulic Side-shift

P.T.O: Included in delivery

Rpm: 540

drive shaft Ø: 128 mm

trailing roller Ø: 105 mm

Drive: 4 piece drive belt

Dimensions: 236x95x93 cm (LxWxH)

Packaging: wooden crate

Dimensions of packaging: approx. 245x87x83 cm (LxWxH)

Weight including packing: approx. 570 kg