
AgroHof.com

TBF-220

Tractor Tiller rotary tiller, rear tiller, field tiller. 2.20 m

Item no.: J33-10324

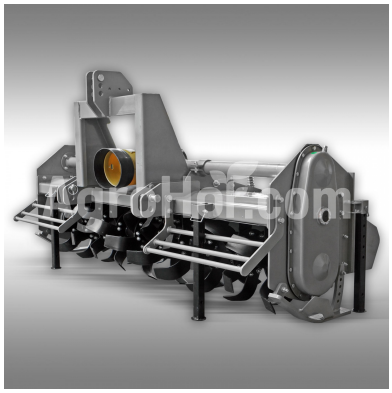

Seller

Agrohof Kft.
6064 Tiszaug, Bokros tanya 16.
Tax number: 25366895-2-03
EU VAT number: HU25366895

Sales

+36 56 770 010
info@agrohof.com

https://agrohof.com/product/tbf-220-tractor-tiller-rotary-tiller-rear-tiller-field-tiller-220-m

Parameters

Name	Value
Machine Power	min 60 HP
RPM	540 rpm
Weight	640 kg

Description

Whether for agriculture or field work, vineyards, orchards or landscaping - the Jansen TBF-220 tractor rotary tiller is ideal for every kind of tilling project. The tiller has a specially strengthened angular gearbox and is characterised by its especially robust construction. The shaft is powered by the gear wheels in an oil bath. The rear safety flap with built-in levelling springs eliminates uneven areas in the tilled soil and ensures it is broken up finely.
The working with is approx. 220 cm and the tilling depth up to 16 cm (depending on soil properties). Both can be regulated using the runners mounted on the side. The 10 rows of heavy-duty tiller blades are mounted to the tough rotor shaft. The tiller is driven using the P.T.O., which comes as part of delivery, and is mounted to the three-point linkage of your tractor (Cat. II).
Your tractor should have at least 60 HP.
Technical specifications:
Milling width: approx. 220 cm
Tilling depth: max. 16 cm (depending on soil properties)
Tiller blades: 60 total
Tiller blades per flange: 6 pieces
P.T.O.: included
Rpm: 540
Weight: approx. 640 kg
Dimensions: 240x105x95 cm (LxWxH)
Rotor shaft drive: gear drive in oil bath
Mount: Three-point hitch Cat. II
Packaging: Steel frame
Pkg. dimensions: approx. 242x110x93 cm (LxWxH)
Weight including packaging: approx. 666 kg
Tractor: min. 60 HP