
AgroHof.com

TS-14L105

Log splitter, tractor hydraulic, 14 tons, horizontal

Item no.: J33-10391

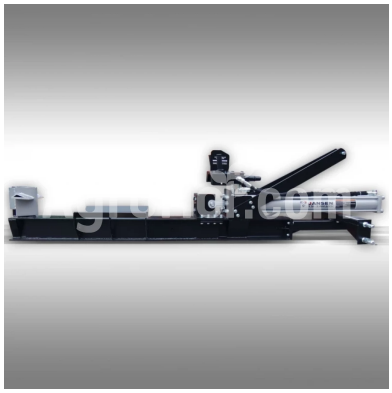

Seller

Agrohof Kft.
6064 Tiszaug, Bokros tanya 16.
Tax number: 25366895-2-03
EU VAT number: HU25366895

Sales

+36 56 770 010
info@agrohof.com

https://agrohof.com/product/ts-14l105-log-splitter-tractor-hydraulic-14-tons-horizontal

Parameters

Name	Value
Weight	214 kg
Oil pressure	175 bar
Oil flow	41.6 l/min
Dimensions	2690x860x750 mm

Description

This very compact and powerful tractor mounted log splitter reaches a splitting force of 14 tons and will split any piece of wood! The splitter can be simply fitted to the 3-point linkages of your tractor/unimog etc. (ISO cat 1 and 2 linkages). It is operated using the hydraulic connections of the vehicle, a supply and return line is required for this (return line must be free of pressure). The splitter is easily mountable at the desired height using the 3-point hitch.
This tractor mounted log splitter has a huge ram stroke of 105 cm and a cylinder stroke of 100 cm. The cylinder needs 15 seconds for a complete forward phase and 17 seconds to return.
We will also deliver a 4-way splitting wedge to you, absolutely free of charge.
The somewhat different technique using this splitter will guarantee you a high working speed: The wood is forced by the cylinder onto the wedge and can fall behind, having been split. If a piece of wood should become stuck on the splitting wedge or 4-way splitting wedge, you can simply continue with the next piece which will free the way again! The cylinder automatically returns to the start position so that you don’t have to hold the lever. Additionally, you can stop the lever in any position, as well as return to the start position. The full splitting force is always applied. Many other splitters need to return the cylinder to the start position, which costs a great deal of time.
The log splitter is delivered with the legally prescribed 2-handed operation.
Technical specifications:
Drive: hydraulic, 2-stage (via tractor)
Hoses for connection to the carrier vehicle included
Weight: approx. 214 kg (dry)
Splitting force: 14 tons
Scope of delivery: 4-way wedge and splitting wedge
Oil pressure: Approx. 175 bar with 14t
max. oil flow rate: 41.6L/min.
max. log opening: 1050 mm
Cylinder bore: 100 mm
Cylinder running time: forward 15s, back 17s
Tractor linkage: Cat. 1 and Cat. 2 (bolts included)
Dimensions: 2690x860x750 mm (LxWxH)
Dimensions of packaging: 2090x490x620 mm (LxWxH)
Weight including packaging: 255 kg