
AgroHof.com

UKF-145

Reverse rotation tille tractor tiller, pulverising roller, 1.45m

Item no.: J33-10326

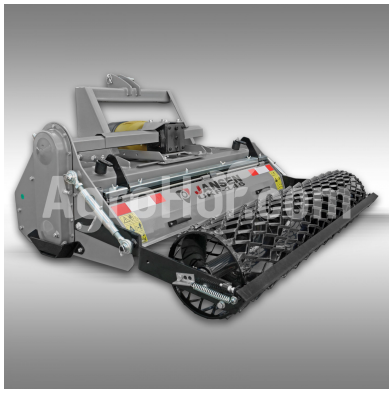

Seller

Agrohof Kft.
6064 Tiszaug, Bokros tanya 16.
Tax number: 25366895-2-03
EU VAT number: HU25366895

Sales

+36 56 770 010
info@agrohof.com

https://agrohof.com/product/ukf-145-reverse-rotation-tille-tractor-tiller-pulverising-roller-145m

Parameters

Name	Value
Machine Power	min 35 HP
RPM	540 rpm
Weight	358 kg

Description

Whether for agriculture or field work, vineyards, tree farms, orchards or landscaping - the Jansen UKF-145 reverse rotation tractor tiller is an indispensable tool in landscaping and agriculture and ideal for compact and narrow track tractors. The impressive power and innovative functions set new standards in soil and seedbed preparation. The working width is approx. 145 cm and the tilling depth approx. 16 cm. The tiller is driven using the P.T.O., which comes as part of delivery, and is mounted to the three-point linkage of your tractor (Cat. I and Cat. II). Your tractor should have at least 35 HP.
EXTREMELY ROBUST. SAFE. EFFICIENT.
Many years of experience in development and manufacturing have culminated in this tractor tiller, a machine that stands out particularly due to its robust construction and clearly differentiates itself from the competition.
WHAT DO WE DO DIFFERENTLY?
solid material thicknesses, no thin sheets
reinforced, robust three-point hanger
roller with extra strong mesh and material thicknesses
robust tilling blades on a solid rotor shaft
P.T.O. included
TECHNICAL DATA:
Tractor power: min. 35 HP
Tilling width: approx. 145 cm
Tilling width: approx. 16 cm
Tiller blades: 28 total
Tiller blades per flange: 4 blades
P.T.O.: included
RPM: 540
Rotor shaft drive: Drive chain in oil bath
Mount: Cat. I + Cat. II
Weight: approx. 358 kg
Installed dimensions: approx. 140x170x100 cm (LxWxH)
Pkg. dimensions: approx. 173x100x92 cm (LxWxH)
Weight including packaging: approx. 425 kg
PULVERISING ROLLER FOR A PERFECT SEEDBED
One of the special features of the Jansen UKF-145 is the built-in pulverising roller. This roller ensures a top quality soil structure and pulverised seedbed, ideal conditions for sowing. The reverse direction tilling shaft throws stones and larger plant waste against the very tough digits, separating them from the soil. The result: optimal conditions for your plants to grow.

AgroHof.com

REVERSE ROTATION FOR OPTIMAL RESULTS

The Jansen UKF-145 reverse rotation tractor tiller is equipped with a tilling shaft which turns opposite to the direction of travel. This ensures the soil is worked thoroughly and pulverised for the seedbed. Resulting in even, high-quality soil conditions for your plants.

HIGH-RESISTANCE TILLING BLADES

The tilling blades on the Jansen UKF-145 are made from forged steel, developed specifically for lasting performance and extreme durability. No matter the challenge, with this tiller you are well equipped to achieve reliable results