


Jansen AS-600K

Branch sa, tractor pruning saw

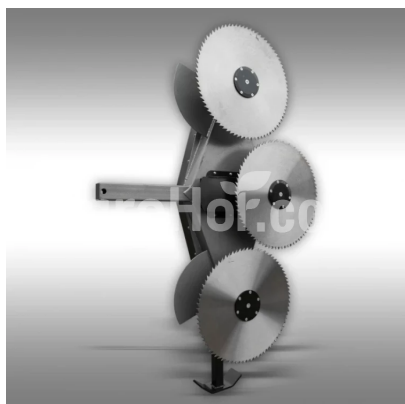

Company seat

Agrohof Kft.
6064 Tiszaug, Bokros tanya 16.

Sales

+34 667 954 677
info@agrohof.com

<https://agrohof.com/sku/j33-10412>



Parameters

Name	Unit
Oil pressure	160-210 bar
Weight	180 kg

Description

With the Jansen AS 600K pruning saw, you can sever branches up to 200 mm thick with ease. In the agricultural industry, the AS 600K pruning saw is known for its smooth run and very clean cut, making it excellent for cutting trees, hedges and bushes.

It includes 3 specially hardened saw blades (with 80 teeth) each with a diameter of 600 mm and a weight of 14 kg. The saw has an effective working width of approximately 1,750 mm.

Mounted on a wheelloader, telescopic handler or a tractor frontloader, the pruning saw is hydraulically powered.

The necessary hydraulic connectors on the carrier vehicle are 1x double acting (for the hydraulic motor of the saw blades, a pressureless return would be optimal). Depending on the circumstances and requirements, we recommend an operational speed of approximately 2 to 13 km/h.

Technical data:

Image: Euro front loading Image

Saw blades: 3 pieces.

Saw blade diameter: 600 mm

Scope of delivery: saw blade protector

Saw teeth: 80 pieces.

Effective cut edge: 1,750 mm

Branch diameter (max.): 200 mm

Operating speed: 2 -13 km/h

Hydraulic connections: 1x double acting (pressureless return would be optimal)

Oil pressure: 160-210 bar

Oil flow rate: 45 - 70 l/min

Weight without packing: approx. 180 kg

Packing Dimensions: approx. 190x110x48 cm (LxWxH)

Weight including packing: approx. 208 kg